




8-Port PoE Switch (Unmanaged)

It can reach lightning protection level 3. The device can support up to 8 PoE ports (The total PoE power is 65W). In order to acquire smooth monitoring, it's recommended to connect max 8 IP cameras at a bit rate of less than 2Mbps respectively



Dimensions (mm)

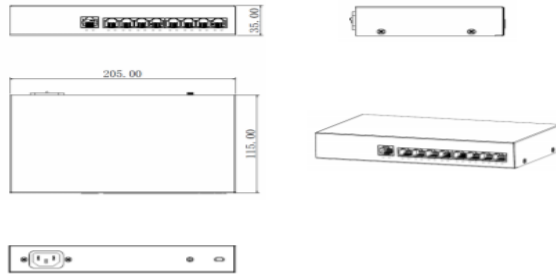

| | |
|------------------------|---|
| Ethernet Port | 1*10/100 Base-T 8*10/100 Base-T (PoE power supply) |
| PoE Power Consumption | Each power ≤30W, Totals65W |
| PoE Protocol | IEEE802.3af, IEEE802.3at |
| Switching Capacity | 1.8Gbps |
| Packet Forwarding Rate | 1.339Mpps |
| Packet Buffer Memory | 1Mbit |
| MAC Table Size | 2K |
| Flow Control | Enable by default |
| Application Humidity | 10%~90% |
| Power | Input AC100~240V |
| Lightning Protection | Common Mode 2KV Differential Mode 1KV |
| Working Temperature | -20°C ~ +55°C |
| Weight | 0.7Kg |
| Dimension(W×D×H) | 205mm×115mm×35mm |